


Convolutated PTFE Tubing

Technical Properties

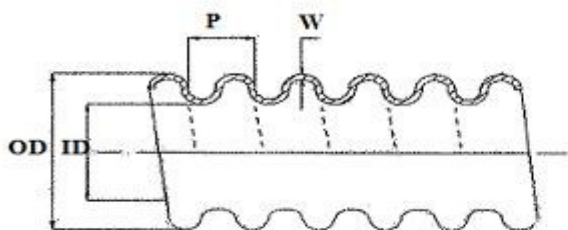

OD= Outside Diameter
 ID= Inside Diameter
 P= Pitch
 W= Wall thickness

Adtech Part Numbers	CPT3 and CPT1
Service Temperature Range	-70°C to +260°C
Shelf Life	N/A
Chemical Resistance	Virtually total
Water Absorption	0.01%
Flammability	Non-flammable UL94 Rating V-0
Dielectric Strength	19.7kV/mm
Tensile Strength	Longitudinal 33 N/mm ² , Transverse 31N/mm ²
Shore Hardness	D55
Colour Range	Black as standard, other colours from our range available on request
Applicable Standards	PAN 6627

For more information about our Convolutated PTFE Tubing, please visit adtech.co.uk.

For technical assistance, contact our customer service team:

+44 (0)1285 762000 - sales@adtech.co.uk