




Smooth Bore PTFE Convoluted Tubing

PTFE flexible convoluted conduits are extensively used for electrical cables in the aerospace industry. They are used more and more in other industrial applications for similar use and also as light duty chemical transfer hoses.

We offer a standard range of smooth bore convoluted tube. Working temperatures range from -70°C to + 260°C. Ends can be supplied cuffed (straightened) or flanged for easy connection.

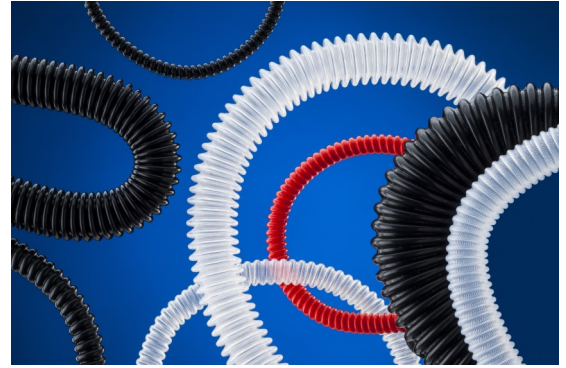

Standard Smooth Bore PTFE Convoluted Tubing Sizes

ID +/-0.75 (mm)	OF +/-0.75 (mm)	Web (mm)	MBR (mm)	Pitch (mm)	Weight (g/m)
6.80	8.60	0.23 +/-0.08	38	1.21	41
10.00	12.50	0.30 +/-0.08	51	1.59	70
13.60	16.40	0.38 +/-0.08	76	1.95	70
16.70	20.20	0.46 +/-0.08	102	2.31	161
19.80	24.30	0.46 +0.10/-0.08	127	2.82	204

For more information about our PTFE Convoluted Tubing, please visit adtech.co.uk.

For other custom sizes or technical assistance, contact our customer service team:

+44 (0)1285 762000 - sales@adtech.co.uk